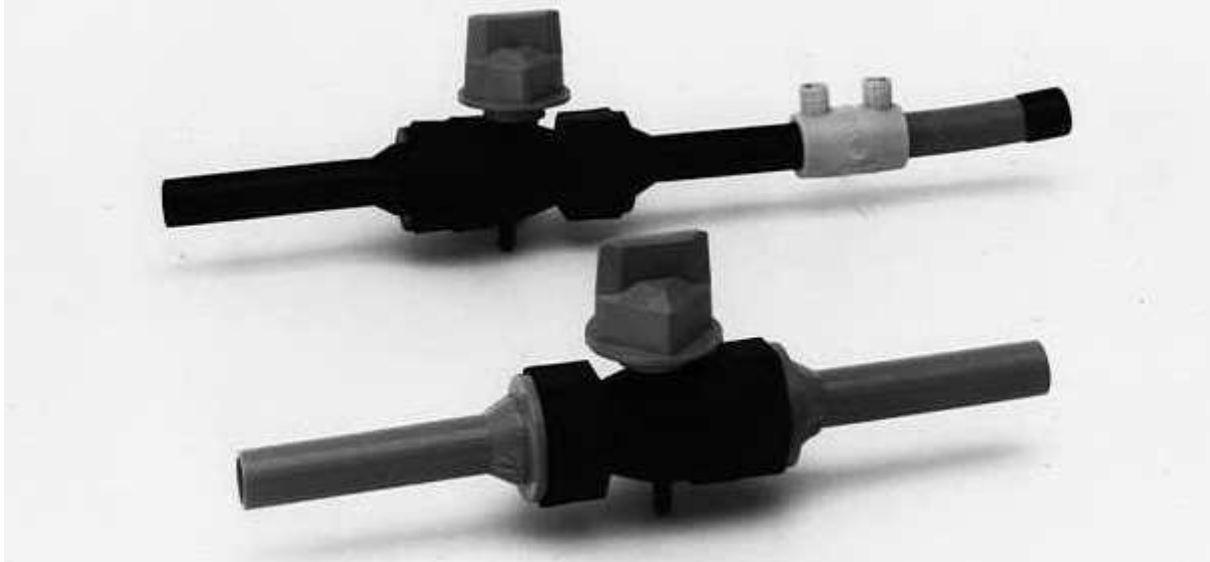


UNIVERSAL / FUSION CURB VALVE

- Our unique mechanical squeezing enables all valve seals to fully compress insuring superior sealing.
- All valve parts are made of DuPont 80G33 Supertough Glass reinforced Nylon™, except the turning head which does not have glass reinforcement. Expansion and contraction rates of the various parts, due to temperature change will be similar. The Supertough additive provides high-impact even at cold temperatures.
- All seals are made of Buna N (the best for natural gas) and coated with grease for maximum lubrication and protection.
- This valve may also be used as a sewer valve. But, only in a pressure sewer installation.
- This valve may also be used as a water valve. But, only in an installation that is using black 3408 pipe non-drinking, non-potable water lines.
- The ball valve features a .965 port opening.
- A 90° shutoff is standard. However, a 360° is also available.
- No cathodic protection is required for this valve.
- Available with 2406 or 3408 P.E. ends. Please specify when ordering.
- Ideal for butt, socket, or electro-fusion installations. The valve can also be used with standard or reducer couplings.
- Every valve manufactured at Handley Industries is tested to ANSI B16.40 paragraphs 3.2.1 (shell test), 3.2.2 (seat test), and 3.3.1 (operating test) prior to shipment. For other test documentation, call the factory for a test data packet.
- Available in sizes 1/2" CTS thru 1 1/4" IPS.
- Meets or exceeds ANSI B16.40 standards.

HOW TO ORDER UNIVERSAL CURB VALVES

Choose from the following categories to build the fusion valve best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ONE = CONNECTION TYPE U = Universal S = 2 Piece Single Socket	TWO = PIPE SIZE 1 = ½" 3 = 1" 2 = ¾" 4 = 1¼"	THREE = PIPE SPECIFICATION C = CTS (Copper Tube Size) I = IPS (Iron Pipe Size)
FOUR = PIPE WALL THICKNESS Applies to Code U from GROUP ONE 01 = .090 05 = .121 02 = .095 06 = .151 03 = .099/.103 07 = .166 04 = .119	FIVE = MATERIAL DESIGNATION B = Yellow 2406 C = Black 3408	SIX = OTHER OPTIONS (Note the following code if the option is desired:) J = 360° Turning Head X = Valves Assembled to a VC1

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.

